


R919S



Energy
Management

Ball valve for water for heating systems, full port

Datasheet
0627EN 11/2022

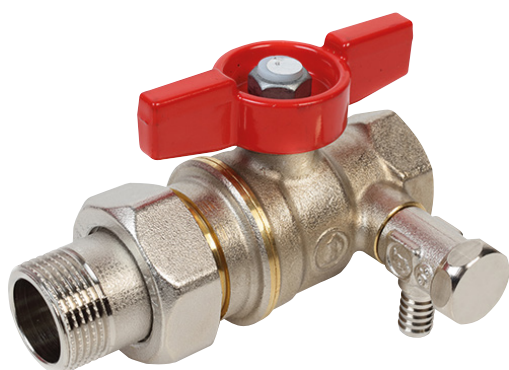

DADO ball valve, female-tail piece male threaded connections, with drain cock with hose connection Ø 9 mm. Full port.



Versions and product codes

PRODUCT CODE	CONNECTIONS	DRAIN COCK SIZE	FINISHING	HANDLE TYPE	HANDLE COLOR	NOTES
R919SX003	G 1/2"F x G 1/2"M	1/4"	Nickel plated brass	T-handle	Red	DADO ball, with drain cock
R919SX005	G 3/4"F x G 3/4"M	1/4"	Nickel plated brass	T-handle	Red	DADO ball, with drain cock
R919SX007	G 1"F x G 1"M	1/4"	Nickel plated brass	T-handle	Red	DADO ball, with drain cock
R919SX009	G 1-1/4"F x G 1-1/4"M	3/8"	Nickel plated brass	T-handle	Red	DADO ball, with drain cock

Technical data

Main features and materials


- Suitable for water for heating/cooling systems
- Full port
- Valve made of UNI EN 12165 CW617N nickel plated brass
- Stem with double O-Ring
- Nut with anti-corrosion coating, with guarantee seal and hologram
- Aluminium T-handle, red painted
- DADO ball
- Drain cock with hose connection Ø 9 mm

Field of applications

- Temperature range: -20÷120 °C (-20 °C with 50 % glycol solutions)
- Max. working pressure at 20 °C with water:
4.2 MPa (42 bar) for 1/2", 3/4"
3.5 MPa (35 bar) for 1", 1-1/4"

Dimensions and Kv

PRODUCT CODE	DN	A [mm]	I [mm]	B [mm]	J [mm]	C [mm]	H [mm]	H' [mm]	Kv
R919SX003	15	93	34	55	17	63	wr.25	wr.30	13,3
R919SX005	20	103	37	65	21	73	wr.32	wr.38	25,8
R919SX007	25	115	44	72	26	73	wr.39	wr.46	50,9
R919SX009	32	137	57	82	30	73	wr.48	wr.53	103



Product specifications

R919S

DADO ball valve, with female-tail piece male threaded connections. Suitable for water for heating/cooling systems. Valve made of UNI EN 12165 CW617N nickel plated brass. Full port. Aluminium T-handle, red painted. Stem with double O-Ring. Nut with anti-corrosion coating, with guarantee seal and hologram. Drain cock with hose connection Ø 9 mm. Temperature range: -20÷120 °C (-20 °C with 50 % glycol solutions). Max. working pressure at 20 °C with water: 4.2 MPa (42 bar) for 1/2", 3/4"; 3.5 MPa (35 bar) for 1", 1-1/4".

⚠ Safety Warning. Installation, commissioning and periodical maintenance of the product must be carried out by qualified operators in compliance with national regulations and/or local standards. A qualified installer must take all required measures, including use of Individual Protection Devices, for his and others' safety. An improper installation may damage people, animals or objects towards which Giacomini S.p.A. may not be held liable.

♻ Package Disposal. Carton boxes: paper recycling. Plastic bags and bubble wrap: plastic recycling.

ℹ Additional information. For more information, go to giacomini.com or contact our technical assistance service. This document provides only general indications. Giacomini S.p.A. may change at any time, without notice and for technical or commercial reasons, the items included herewith. The information included in this technical sheet do not exempt the user from strictly complying with the rules and good practice standards in force.

🗑 Product Disposal. Do not dispose of product as municipal waste at the end of its life cycle. Dispose of product at a special recycling platform managed by local authorities or at retailers providing this type of service.