

# R613, R614



Water  
Management

## Under-sink cock (R613) Washing machine cock (R614)

Datasheet  
0784EN 01/2024



R613

R614

Under-sink ball cock (R613) or washing machine ball cock (R614), with threaded male-male connections. Standard port.

### ➤ Versions and product codes

SERIES	PRODUCT CODE	CONNECTIONS	FINISHING	HANDLE TYPE	HANDLE COLOUR	NOTES
R613	R613X003	G 1/2"M x G 1/2"M	Chrome plated brass	Plastic handle	Chrome plated	With chrome plated cover plate
R614	R614X004	G 1/2"M x G 3/4"M	Chrome plated brass	Plastic handle	Chrome plated	With chrome plated cover plate

## Technical data


### Main features and materials

- Specifically for use under sinks (R613) or for washing machines (R614)
- Standard port
- Cocks made of UNI EN 12165 CW617N chrome plated brass
- NBR gasket
- Sealing collar in protected AISI 430 steel
- ABS lever (R613) or zamak lever (R614)

### Fields of applications

- Min. working temperature: 5 °C
- Max. working temperature: 70 °C (90 °C for short periods of time)
- Max. working pressure at 20 °C with water: 1,0 MPa (10 bar)

### Loss of pressure

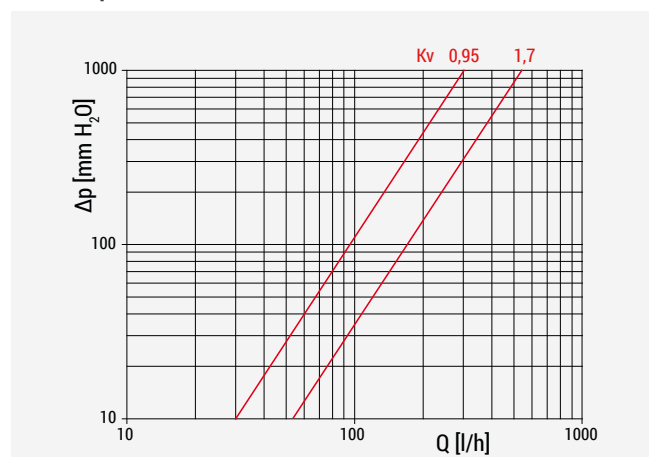


PRODUCT CODE	Kv
R613X003	0,95
R614X004	1,7

## Dimensions


### R613

PRODUCT CODE	DN	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Kv
R613X003	6	G 1/2"M	G 1/2"M	Ø 55	47	30	26	0,95

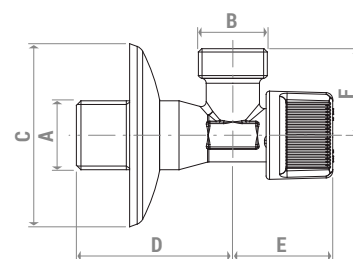

### R614

PRODUCT CODE	DN	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Kv
R614X004	8	G 1/2"M	G 3/4"M	Ø 55	60	29	28	1,7



## Product specifications


### R613


Under-sink ball cock with threaded male-male connections. Made of UNI EN 12165 CW617N chrome plated brass. NBR gasket. Sealing collar in protected AISI 430 steel. ABS lever. Standard port. Min. working temperature: 5 °C. Max. working temperature: 70 °C (90 °C for short periods of time). Max. working pressure at 20 °C with water: 1,0 MPa (10 bar).


### R614

Washing machine ball cock with threaded male-male connections. Made of UNI EN 12165 CW617N chrome plated brass. NBR gasket. Sealing collar in protected AISI 430 steel. Zamak lever. Standard port. Min. working temperature: 5 °C. Max. working temperature: 70 °C (90 °C for short periods of time). Max. working pressure at 20 °C with water: 1,0 MPa (10 bar).

---

 **Safety Warning.** Installation, commissioning and periodical maintenance of the product must be carried out by qualified operators in compliance with national regulations and/or local standards. A qualified installer must take all required measures, including use of Individual Protection Devices, for his and others' safety. An improper installation may damage people, animals or objects towards which Giacomini S.p.A. may not be held liable.

 **Package Disposal.** Carton boxes: paper recycling. Plastic bags and bubble wrap: plastic recycling.

 **Additional information.** For more information, go to [giacomini.com](http://giacomini.com) or contact our technical assistance service. This document provides only general indications. Giacomini S.p.A. may change at any time, without notice and for technical or commercial reasons, the items included herewith. The information included in this technical sheet do not exempt the user from strictly complying with the rules and good practice standards in force.

 **Product Disposal.** Do not dispose of product as municipal waste at the end of its life cycle. Dispose of product at a special recycling platform managed by local authorities or at retailers providing this type of service.