

R913L



Energy
Management

Datasheet
0625EN 11/2023

Ball valve for water for heating systems, full port



DADO ball valve, with male-male threaded connections.
Full port.



➤ Versions and product codes

PRODUCT CODE	CONNECTIONS	FINISHING	HANDLE TYPE	HANDLE COLOR	NOTES
R913LX022	R 3/8" x R 3/8"	Nickel plated brass	Large lever	Red	DADO ball
R913LX023	R 1/2" x R 1/2"	Nickel plated brass	Large lever	Red	DADO ball
R913LX024	R 3/4" x R 3/4"	Nickel plated brass	Large lever	Red	DADO ball
R913LX025	R 1" x R 1"	Nickel plated brass	Large lever	Red	DADO ball
R913LX026	R 1-1/4" x R 1-1/4"	Nickel plated brass	Large lever	Red	DADO ball

Technical data

Main features and materials

- Suitable for water for heating/cooling systems, not dangerous gas and liquid hydrocarbons*
- Full port
- Valve made of UNI EN 12165 CW617N nickel plated brass
- Stem with double O-Ring
- Nut with anti-corrosion coating, with guarantee seal and hologram
- Steel lever handle with anti-corrosion treatment and red PVC coating
- DADO ball


*Please consult Giacomini technical support, to check the compatibility of the product with the specific hydrocarbon.

Field of applications

- Min. working temperature: -20 °C with 50 % glycol solutions
- Max. working temperature with dry saturated steam: 185 °C with 1,05 MPa (10,5 bar)
- Max. working pressure at 20 °C with water and not dangerous gas: 4,2 MPa (42 bar) for 3/8", 1/2", 3/4"
- 3,5 MPa (35 bar) for 1", 1-1/4"
- Temperature range with liquid hydrocarbons*: -20÷60 °C
- Max. working pressure at 20 °C with liquid hydrocarbons*: 1,2 MPa (12 bar)

Dimensions and Kv

PRODUCT CODE	DN	A [mm]	I [mm]	B [mm]	J [mm]	C [mm]	H [mm]	Kv
R913LX022	10	63	28	46	13	77	wr.21	7
R913LX023	15	73	34	52	16	77	wr.25	13,3
R913LX024	20	82	38	69	21	95	wr.32	25,8
R913LX025	25	92	44	77	25	95	wr.39	50,9
R913LX026	32	108	50	87	30	95	wr.47	103

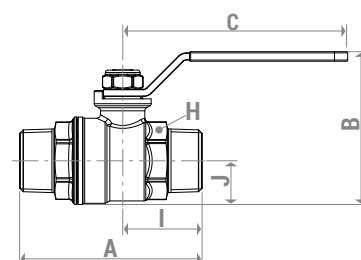

Product specifications

R913L

DADO ball valve, with male-male threaded connections. Suitable for water for heating/cooling systems, not dangerous gas and liquid hydrocarbons. Valve made of UNI EN 12165 CW617N nickel plated brass. Full port. Steel lever handle with anti-corrosion treatment and red PVC coating. Stem with double O-Ring. Nut with anti-corrosion coating, with guarantee seal and hologram. Min. working temperature: -20 °C with 50 % glycol solutions. Max. working temperature with dry saturated steam: 185 °C with 1,05 MPa (10,5 bar). Max. working pressure at 20 °C with water and not dangerous gas: 4,2 MPa (42 bar) for 3/8", 1/2", 3/4"; 3,5 MPa (35 bar) for 1", 1-1/4". Temperature range with liquid hydrocarbons: -20÷60 °C. Max. working pressure at 20 °C with liquid hydrocarbons: 1,2 MPa (12 bar).

⚠ Safety Warning. Installation, commissioning and periodical maintenance of the product must be carried out by qualified operators in compliance with national regulations and/or local standards. A qualified installer must take all required measures, including use of Individual Protection Devices, for his and others' safety. An improper installation may damage people, animals or objects towards which Giacomini S.p.A. may not be held liable.

♻ Package Disposal. Carton boxes: paper recycling. Plastic bags and bubble wrap: plastic recycling.

ℹ Additional information. For more information, go to giacomini.com or contact our technical assistance service. This document provides only general indications. Giacomini S.p.A. may change at any time, without notice and for technical or commercial reasons, the items included herewith. The information included in this technical sheet do not exempt the user from strictly complying with the rules and good practice standards in force.

♻ Product Disposal. Do not dispose of product as municipal waste at the end of its life cycle. Dispose of product at a special recycling platform managed by local authorities or at retailers providing this type of service.