
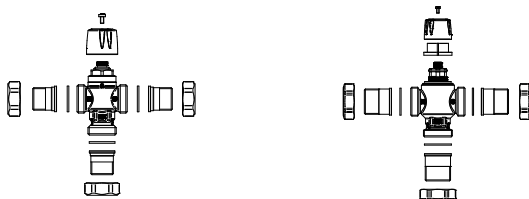


CARATTERISTICHE DI UTILIZZO

Per ottenere un funzionamento ottimale

seguire le indicazioni:

Campo di Regolazione	30-65°C
Minimo Δt agli Ingressi	10°C
Max Pressione Statica	10 bar
Max Pressione Dinamica	5 bar
Max Sbilanciamento agli Ingressi	2:1
Max Temp. Ingr. (Acqua Calda)	85°C

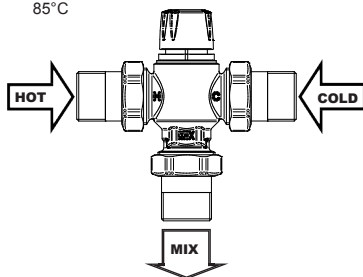

Manutenzione ordinaria.

Prima dell'installazione del dispositivo:

- Verificare la pulizia delle tubature
- Verificare presenza di valvole di ritegno e filtri nell'impianto
- Verificare la temperatura dell'acqua miscelata in uscita dal punto di utilizzo

PORTATE MINIME RICIRCOLO	
1/2"	9 l/min
3/4"	9 l/min
1"	15 l/min
1 1/4"	15 l/min
1 1/2"	40 l/min
2"	40 l/min




GIACOMINI

WATER E-MOTION

Istruzione miscelatore termostatico R156-2

Marzo 2025

MISCELATORE TERMICO



È un componente di circuiti idrotermici che consente di stabilizzare la temperatura dell'acqua calda utilizzata a valori compresi

MIN 30°C MAX 65°C


La scelta della temperatura di utilizzo viene stabilita dalla rotazione del volantino di comando, facendo corrispondere il valore scelto al riferimento posto sul corpo del miscelatore.

TEMPERATURE DI RIFERIMENTO							
	MIN	1	2	3	4	5	MAX
1/2"	27	30	39	48	56	65	70
3/4"	27	30	39	48	56	65	70
1"	26	30	44	51	58	65	68
1 1/4"	26	30	44	51	58	65	68
1 1/2"	25	30	38	46	55	65	69
2"	25	30	38	46	55	65	69

TECHNICAL SPECIFICATION

Follow the instructions for optimal operation:

Outlet Temperature Adjustment Range	30-65°C
Minimum Δt at Inlets	10°C
Max. Static Pressure	10 bar
Max. Dynamic Pressure	5 bar
Max. Pressure Inlet Differential	2:1
Max. Inlet Temp. (Hot Water)	85°C

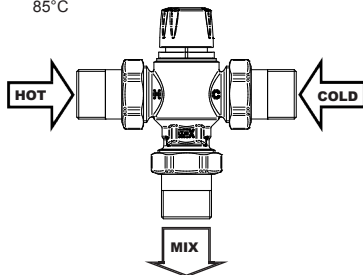



GIACOMINI

WATER E-MOTION

Thermostatic mixer instruction R156-2

March 2025

THERMOSTATIC MIXING VALVE

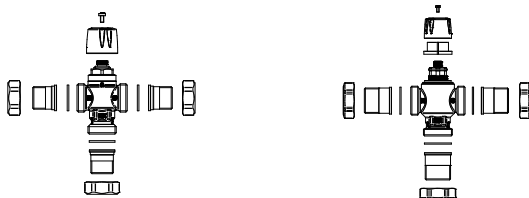

Routine maintenance.

Before installation of the device:

- Check the cleanliness of the pipes
- Check the presence of check valves and filters in the system
- Check the temperature of the mixed water leaving the point of use

MINIMUM RECIRCULATION FLOW RATES	
1/2"	9 l/min
3/4"	9 l/min
1"	15 l/min
1 1/4"	15 l/min
1 1/2"	40 l/min
2"	40 l/min

It is a component of hydrothermal circuits that stabilises the temperature of hot water used at values between

MIN 30°C MAX 65°C

The choice of temperature of use is established by turning the control handwheel, matching the chosen value to the reference on the mixer body.

REFERENCE TEMPERATURES							
	MIN	1	2	3	4	5	MAX
1/2"	27	30	39	48	56	65	70
3/4"	27	30	39	48	56	65	70
1"	26	30	44	51	58	65	68
1 1/4"	26	30	44	51	58	65	68
1 1/2"	25	30	38	46	55	65	69
2"	25	30	38	46	55	65	69

www.giacomini.com